

Powerful 2.4GHz & 5GHz Dual-Band SMB Solution

WAP1200

2 x 2 AC Dual-Band Wall-Mount PoE Access Point



KEY FEATURES


- 802.11AC Dual-Band High Speed:** IEEE 802.11ac concurrent dual-band with 1200Mbps wireless speed.
- Easy Installation:** Wall-mount design with easy installation kit.
- Designed for High Density Usage:** Supports up to a hundred users simultaneously, ideal for crowded environments and BYOD (Bring Your Own Device) workplaces.
- Multiple SSIDs for Security Management:** Supports up to 32 SSIDs (16 x 2.4GHz & 16 x 5GHz) ideal for multiple departments, user groups, customers or guests.
- Fast Roaming:** Roams smoothly between APs without lag or interruption, ensuring top performance for video and voice streaming applications.
- Wide Coverage & High Sensitivity:** Adjustable RF output power and high receiver sensitivity for wide coverage across large spaces.
- Seamless Mobility:** 1.5x greater coverage than typical APs for blanket coverage to ensure seamless connectivity for Wi-Fi devices across enterprise environments.
- Power over Ethernet:** Supports IEEE 802.3at PoE and IEEE 802.3af PSE out as well as included power adapter.
- Built-In RADIUS Server:** With management for up to 256 user accounts.
- Business Environments:** Mainstream choice for SMBs. Suitable for a wide range of commercial applications such as offices, hotels, meeting rooms, schools, campuses, resorts, retail and others.
- Central Management:** Edimax Pro Network Management Suite (NMS), easy and intuitive web-based central management suite, supports AP array architecture.
- Optional Security Cover:** Prevents theft and tampering.

The WAP1200 is high-speed, robust wireless solution designed to meet the needs of modern SMBs with the latest IEEE 802.11ac technology for wireless speeds up to 1200Mbps. A wall-mounted design, industrial-grade performance and build quality combined with user-friendly operation, 11ac speeds and an extensive feature set make an ideal dual-band solution for day-to-day enterprise operations.

For businesses that demand security, flexibility and speed – the Edimax Pro series has a wide range of potential applications from office environments to schools, campuses, hotels and hospitals. Multiple SSIDs can be configured for different departments or user groups and a built-in RADIUS server provides additional verification with a scalable AP array architecture for central management of multiple access points. High-density capacity for up to 100 simultaneous users is ideal for BYOD workplaces or other environments with a high volume of users and wireless devices, and fast roaming allows for seamless transitions between multiple access points. Power over Ethernet support (PoE) and an intuitive web-based management interface provide deployment flexibility and extensive management options for company MIS departments and network administrators. An optional security cover also prevents physical theft or tampering, along with a rogue AP detection function to safeguard your network from unauthorized access.


When performance and security are critical for your business, you need products that are engineered for your industry. The Edimax Pro series is designed to help your business and provide the connectivity that you rely on every day, with safety and effectiveness guaranteed.

Wide Coverage & Multiple SSIDs

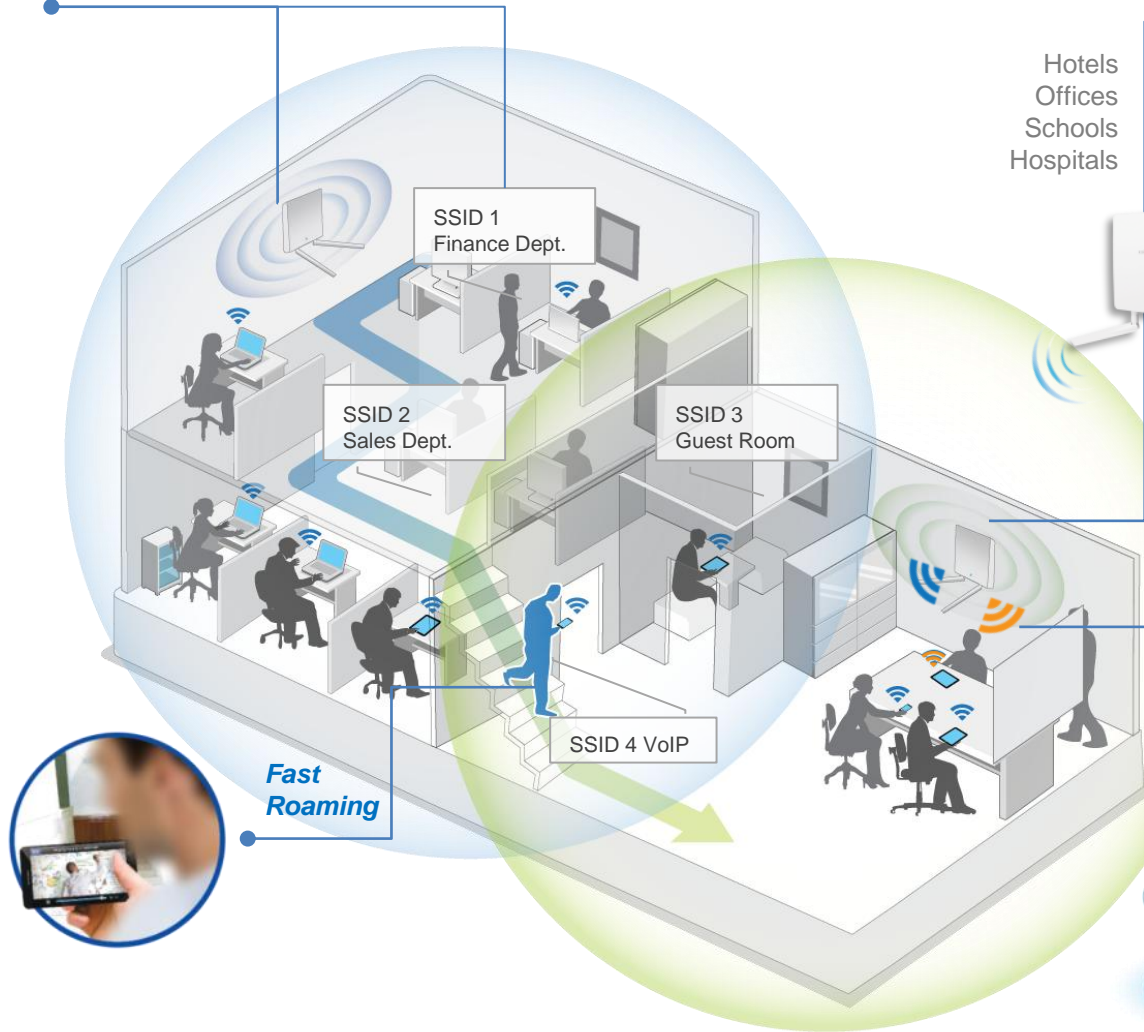


BYOD Solution & High Density Networking


Hotels
Offices
Schools
Hospitals

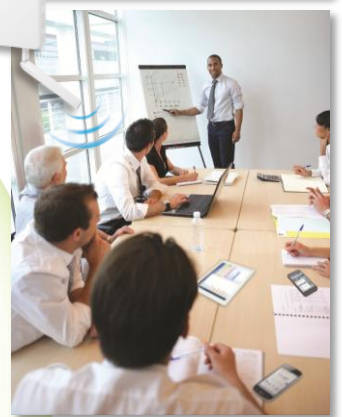


Concurrent Dual-Band




2.4GHz
2D Radiation Pattern@ Vertical

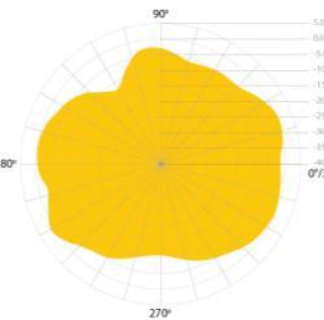

5GHz
2D Radiation Pattern@ Vertical

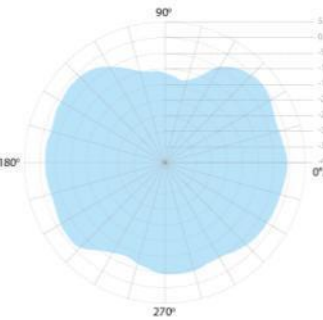

2.4GHz
2D Radiation Pattern@ Horizontal

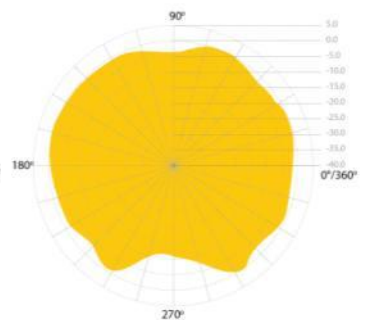

5GHz
2D Radiation Pattern@ Horizontal

Central Network Management Suite



Edimax Pro NMS (Network Management Suite) is a web-based wireless network management system. Company MIS persons can plan and manage Edimax Pro access points' powerful functionality according to their office space using an easy, remote web-based interface which includes a dashboard, map view, traffic statistics and wireless client list for network-wide remote administration. RADIUS settings, WLAN group settings, access control, guest network settings and firmware upgrades can all be managed centrally from a single location to reduce network downtime, aid troubleshooting and optimize network performance. Zone plans and setup wizards are also available for expanding and managing large networks with multiple access points.

2 x 2 AC Dual-Band Wall-Mount PoE Access Point

SPECIFICATIONS



| Hardware | |
|----------------------------------|--|
| LAN Interface | Giga x 2 |
| PoE | 802.3at (in) / 802.3af (out) |
| Antenna | Type: 2 x External / Gain: 2dBi (2.4GHz), 2dBi (5GHz) |
| Power | DC: 12V / 2.5A (Exclude PoE-Out) |
| Dimensions (L x W x H) | 18.3 x 18.3 x 3.6 cm |
| Weight | 527g |
| Power Consumption (Full Loading) | 12W (Exclude PoE-Out) |
| Mounting | Wall / Desktop |
| WPS/Reset | Y |
| LED Indicator | 1. Power LED 2. Diag LED |
| Environmental Conditions | Operating Temperature: 0°C (32°F) to 50°C (122°F) Storage Temperature: -20°C (-4°F) to 60°C (140°F) |
| | Operating Humidity: 90% or Less Storage Humidity: 90% or Less |
| Power Saving | 802.3az |
| Internal Buzzer | Y |
| Security Cover | Y (Optional) |
| Wireless | |
| Standard | 802.11 a/b/g/n/ac Concurrent Dual-Band |
| No. of Radios | 2 |
| Receiver Sensitivity | ≤ -94.5dBm |
| Certification | CE/FCC |
| Fast Roaming | Y |
| Number of SSIDs | 16 (2.4GHz) + 16 (5GHz) |
| Performance | |
| Maximum Data Speed | 300 + 867Mbps |
| Concurrent Clients | Up to 50 Per Radio |
| Security | |
| Encryption | WEP / WPA / WPA2 |
| Wireless L2 Isolation | Y |
| Station Isolation | Y |
| IEEE 802.1x Authenticator | Y |
| EAP Authentication | PEAP |
| Hidden SSID | Y |
| MAC Address Filter | Y |
| Wireless STA | Y |
| Rogue AP Detection (w/ NMS) | Y |
| Software | |
| Wireless Mode | AP / WDS AP / WDS Bridge |
| 802.1q VLAN | Y (VID = 1-4095) |
| Spanning Tree | RSTP |
| QoS | WMM (802.11e) |
| | Max Associated Station No. |
| Pass-Through | IPv6 and VPN (PPTP, L2TP/IPsec) |
| DSCP (802.1p) | Y |
| Multicast Rate up to 54Mbps | Y |

| RF Specifications | | |
|----------------------|--|---|
| Frequency Band | <ul style="list-style-type: none"> •Radio I : 802.11b/g/n 2.412~2.484(GHz) •Radio II : 802.11a/n/ac 5.18~5.24(GHz), 5.745~5.825(GHz) (The supported frequency band is restricted by local regulations.) | |
| Operation Channels | <ul style="list-style-type: none"> •2.4GHz : US/Canada 1-11 / Europe 1-13 / Japan 1-14 •5GHz : Country dependent for the following ranges: 36, 40, 44, 48, 149, 153, 157, 161, 165 | |
| Transmit Power | 802.11b 23dBm@1Mbps 23dBm@2Mbps 23dBm@5.5Mbps 23dBm@11Mbps 802.11g 23dBm@6Mbps 23dBm@9Mbps 23dBm@12Mbps 23dBm@18Mbps 23dBm@24Mbps 22dBm@36Mbps 20dBm@48Mbps 19dBm@54Mbps 802.11gn (2.4G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 26.5dBm@MCS3/11/19 25.5dBm@MCS4/12/20 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23 | 802.11a 22dBm@6Mbps 22dBm@9Mbps 22dBm@12Mbps 22dBm@18Mbps 22dBm@24Mbps 21dBm@36Mbps 19dBm@48Mbps 18dBm@54Mbps 802.11an(5G) 27.5dBm@MCS0/8/16 26.5dBm@MCS1/9/17 26.5dBm@MCS2/10/18 25.5dBm@MCS3/11/19 25.5dBm@MCS4/12/20 24.5dBm@MCS5/13/21 23.5dBm@MCS6/14/22 22.5dBm@MCS7/15/23 802.11ac 27.5dBm@MCS0 26.5dBm@MCS1 26.5dBm@MCS2 25.5dBm@MCS3 25.5dBm@MCS4 24.5dBm@MCS5 23.5dBm@MCS6 22.5dBm@MCS7 20.5dBm@MCS8 19.5dBm@MCS9 |
| | Receiver Sensitivity | 802.11b ≤-93dBm@1Mbps ≤-90dBm@11Mbps 802.11g ≤-90dBm@6Mbps ≤-74dBm@54Mbps 802.11gn (2.4G) ≤-94.5dBm@MCS0 ≤-76.5dBm@MCS7 ≤-90dBm@MCS8 ≤-72dBm@MCS15 ≤-90dBm@MCS16 ≤-72dBm@MCS23 |
| Management | | |
| Deployment | Standalone | |
| | Managed by Edimax Pro NMS | |
| Configuration | HTTP/HTTPS | |
| | SNMP v1, v2c, v3 | |
| | CLI (Telnet, SSH) | |
| RADIUS Server | Built-In | |
| Auto-Channel | Y | |
| Private MIB | Y | |
| Accessory | | |
| Mounting Bracket | Wall-Mount Bracket Kit | |
| Power Adapter | 12V / 2.5A Power Adapter | |
| Optional Accessories | GP-101IT IEEE802.3at PoE Injector SC1000 Security Cover | |

2 x 2 AC Dual-Band Wall-Mount PoE Access Point

Easy Installation Kit


Wall mount with bracket and magnetic template.

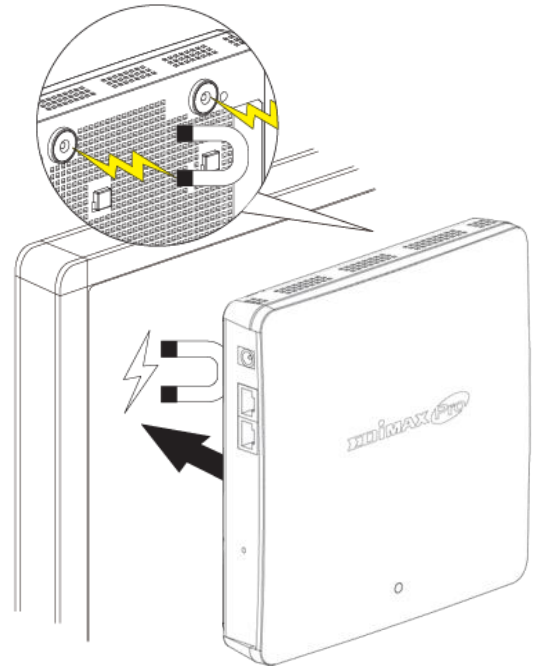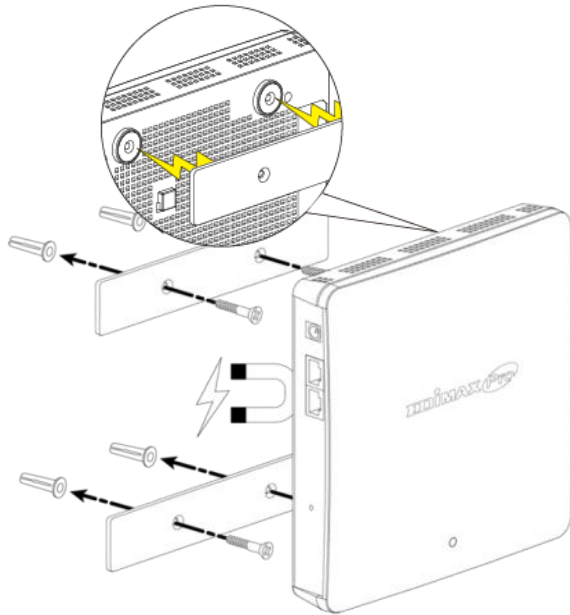

Optional Accessory: Security Cover (SC1000)

| Security Cover for Edimax Pro WAP Series Access Point | |
|---|--|
| Dimensions (L x W x H) | 252.25 x 199 x 28.59 mm |
| Weight (g) | 445g |
| Environment Condition | Operating Temperature: 0°C (32°F) to 50°C (122°F) Operating Humidity: 90% or Less |
| Package Content | Security Cover / Mounting Bracket / Screws / Ejector Key / Key / QIG |

Network security is a critical concern for any modern business and begins with the hardware itself. Edimax Pro access points can be tampered with a robust security cover and lock, preventing the access point from being tampered with or removed and restricting access to authorized persons only.

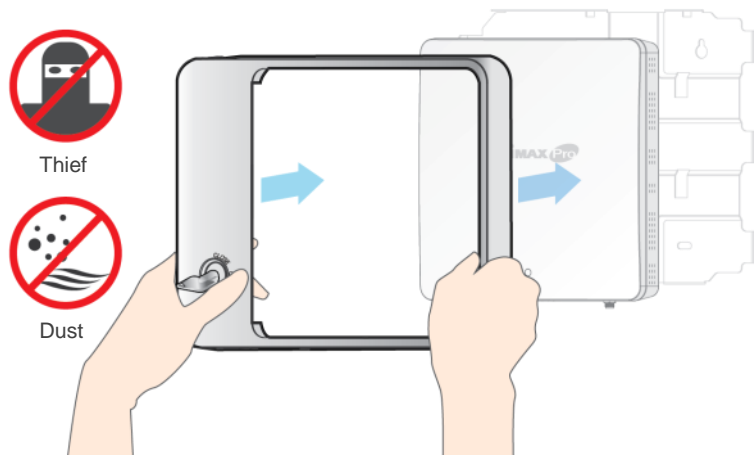

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice. Copyright © 2015 Edimax Technology Co. Ltd. All rights reserved.

www.edimax.com